

PT 33LSC Micro

LAMINATE • SLIT • CUT




Designed to meet the demands of the digital short run printer the PT 33LSC Micro not only cuts to bleed for a finishing product, but also has a variable size encapsulation mode.

Choose your encapsulation width for 2-sided pouch lamination with a customizable border size. In comparison to the competition, the PT 33LSC Micro offers the highest film operating yield with only a 1/8" gap between sheets. Touchscreen programming, high production speeds and the efficient 2" vacuum pile feeder makes for a 'set it and forget it' laminating experience.

FEATURES

- Slits and cuts to finished size
- Film choices include:
 - Gloss
 - Matte
 - Soft-touch
 - ...and more!
- 2" Vacuum pile feeder
- Variable speeds
- Pouch mode with a variable encapsulation size

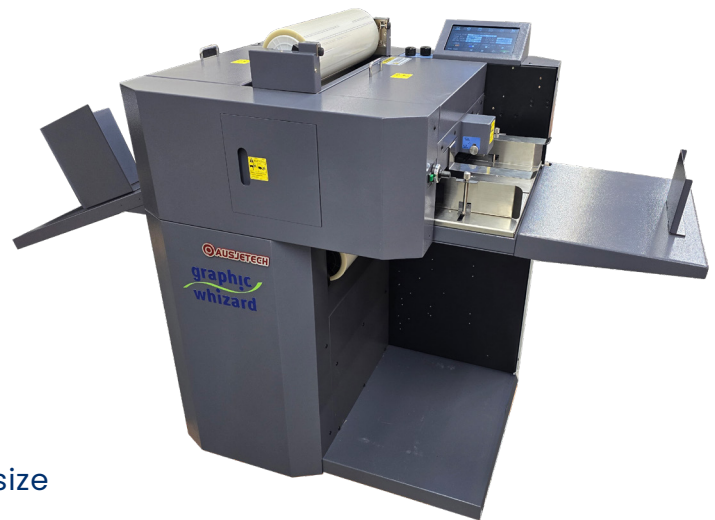

SPECIFICATIONS

Electrical	110-130V, 60Hz, 15A
Floor Model	Yes
Speed	Variable speeds up to 10 feet per minute
Maximum Sheet Size	13" x 19.7" (33.02 cm x 50.038 cm)
Paper Thickness	100-300 gsm (dependent on film thickness)
Lamination Thickness	1.5, 3 & 5 mil*
Laminating Modes	Double-sided encapsulation or trim to bleed
Cutting Method	2 manual setting side slitters and 1 cross cutter assembly
Feeding Method	2" (5.08 cm) vacuum pile feeder

*Film weight compatibility varies with laminating mode.

NOTE: Machine performance will vary based on stock weight, type, and specifications of the job being performed.

WARRANTY: 3 year warranty (excludes consumables)

